


DISCRIMINATOR

S-JTM 455C

LEADED TYPE

455KHz




APPLICATIONS

- ▶ Communications
- ▶ Micro processor
- ▶ Home appliance

TECHNICAL CHARACTERISTICS

Part no.	Center frequency	Recovered audio 3dB BW	Recovered audio output (mV) min.	Distortion factor (@Fo) (%) max.	Applicable IC.
S-JTM 455C 2	455KHz \pm 2KHz	-		3	TA8104F
S-JTM 455C 3	455KHz \pm 2KHz	-		3	CXA1184M
S-JTM 455C 28	455KHz \pm 2KHz	Fn \pm 4KHz min.	40 \pm 25	3	TA1142FN
S-JTM 455C 32	455KHz \pm 2KHz	Fn \pm 4KHz min.	40 \pm 25	3	TA31143

DIMENSIONS

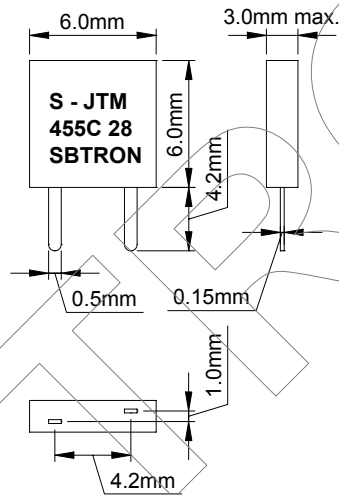

Specifications subjects to change without notice & If you need other specifications, Contact our factory.