

CRYSTAL SBX - 18

APPLICATIONS


CERAMIC SMD

5mm X 3.2mm X 0.9mm(H)

PICTURE
AREA

- ▶ PDA
- ▶ Notebook PC
- ▶ Digital camera
- ▶ Portable systems

OUTLINE DIMENSIONS

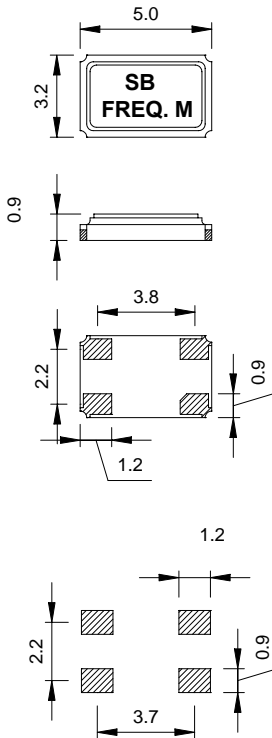


[Soldering pad]

ELECTRICAL SPECIFICATIONS

Frequency range	11.0592MHz ~ 40.000MHz		
Frequency tolerance	±20ppm	±30ppm	± 50ppm
Frequency stability	±30ppm	±50ppm	±100ppm
Operating temperature range	-0 °C ~ 70 °C	-20 °C ~ 70 °C	-40 °C ~ 85 °C
Operable temperature range	-40 °C ~ 85 °C		
Storage temperature range	-55 °C ~ 125 °C		
Shunt capacitance (C0)	7pF max.		
Load capacitance (CL)	7pF to 33pF, Series		
Drive level	100µW max. (Typical)		
Aging (at 25 °C)	±5ppm / year max.		
Insulation resistance	500MΩ min.		
Frequency range	ESR (Ω) max.	Oscillation mode	
12.0000MHz ~ 14.9999MHz	50	Fundamental	
15.0000MHz ~ 19.9999MHz	40	Fundamental	
20.0000MHz ~ 24.0000MHz	30	Fundamental	
24.0000MHz ~ 27.0000MHz	35	Fundamental	
27.0000MHz ~ 40.0000MHz	40	3'rd overtone	

INTERNAL CONNECTION



Bottom view

Note :
Pin#2 and #4 are connected through cover.
In case connected to GND, frequency might be drifted.

ORDERING GUIDE

SBX - 18 - Frequency :	
Load capacitance :	pF
Crystal impedance :	Ω
Stability :	± ppm (at 25 °C)
Tolerance :	± ppm (°C ~ °C)
Drive level :	µW
Shunt capacitance :	pF
Packing type :	Bulk / Reel taping

Specifications subjects to change without notice & If you need other specifications, Contact our factory.

APPLICATIONS CIRCUIT

